



BMG-A SERIES

Bottom Mounted Medium Temp Glass Door Merchandisers With Graphic Panel

MODELS

- BMG-48A
- BMG-74A

FEATURES

CONSTRUCTION

- 24 gauge painted steel interior and exterior
- Standard 3" casters
- Cord and plug standard on all self-contained models
- Replaceable magnetic vinyl door gaskets
- Five white epoxy-coated, heavy-duty, welded wire shelves per door (four cantilever and one bottom)
- Cantilever shelves are two-position and adjustable in 1" increments
- Equipped with electronic T8 interior lamps
- Independent on/off light switch
- 2" foamed-in-place "zero ODP" urethane insulation

FINISH

- Sparkling white polyester enamel interior and exterior
- Painted white back

DOORS

- Door size: 23⁷/₈" x 52³/₁₆"
- Black door rails and handles
- Extra large, auto-close, triple pane, safety glass doors
- 90° hold-open feature
- Adjustable torsion bar hinges
- Door hinges easily adjustable for closing tension and leveling

REFRIGERATION

- Self-contained, factory tested, bottom mounted refrigeration system
- Top mounted low profile interior fan housing
- Automatic condensate evaporator
- Refrigerant: R-134a

- Temperature range: 34° to 41°F (1° to 5°C)
- R-factor (insulation efficiency rating): 17.24

WARRANTY

- Standard limited four year extended compressor, one year parts and one year labor

OPTIONS

- Custom exterior colors
- Baskets
- Additional shelves
- Price tag molding for shelves




BMG-A SERIES

BOTTOM MOUNTED MEDIUM TEMP GLASS DOOR MERCHANDISERS WITH GRAPHIC PANEL


TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H*	L	D	H*							
BMG-48A	52	36 ³ / ₄	82 ⁷ / ₈	1321	933	2105	115	8.7	1/3	2	49.0	117.0	755/343
BMG-74A	78	36 ³ / ₄	82 ⁷ / ₈	1981	933	2105	115	13.1	1/2	3	75.5	168.0	1025/466


*Height includes casters.

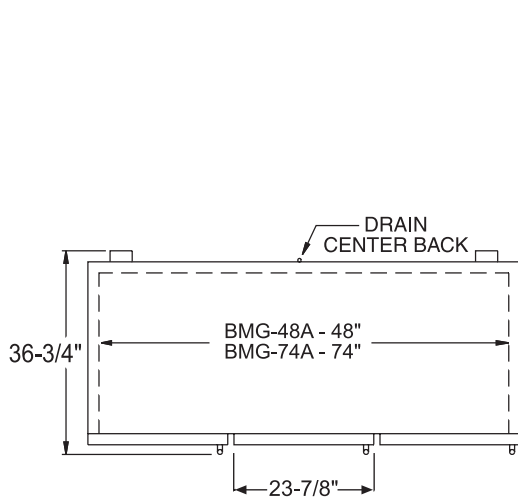

PLAN VIEW

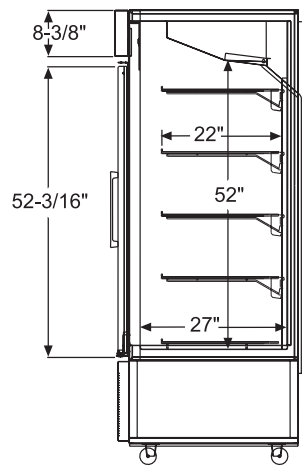

SIDE VIEW

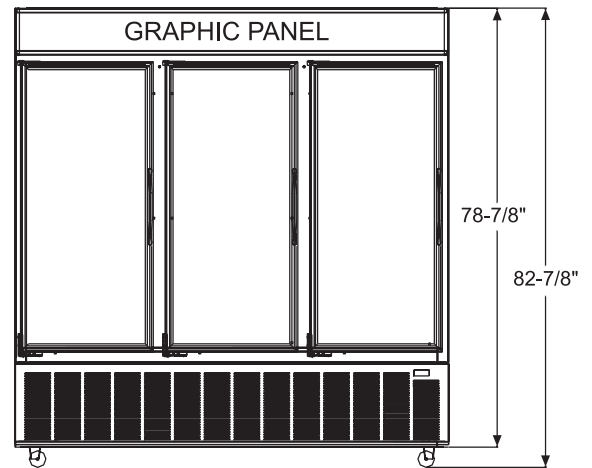


ELEVATION VIEW

LISTINGS



HOOKUP

Via plug in, 10 foot long, flexible four-wire 14 gauge cord with molded plug.



NEMA 5-20P

BID SPECIFICATIONS

Item no. BMG- _____ A.
Provide _____ ()
Bottom Mounted Medium Temp Glass Door Merchandiser(s) With Graphic Panel, Master-Bilt model no. BMG-_____ A.

Merchandiser to be provided with a lighted sign on the top front. Other features will include adjustable torsion bar hinges, standard 3" diameter casters, top mounted low profile interior fan hous-

ing, automatic condensate evaporator, electronic T8 interior lamps, independent on/off light switch for interior lights and lighted sign and black door rails and handles.

Merchandiser also to be equipped with five white epoxy-coated shelves (four cantilever and one bottom) per door. The back of the merchandiser is to be painted white.

The refrigeration system is to be bottom

mounted, self-contained and use R-134a refrigerant. System will contain a low maintenance bare tube condenser coil. The temperature range will be 34° to 41°F (1° to 5°C).

Merchandiser to have standard limited four year extended compressor warranty and one year limited parts and labor warranty.

Merchandiser to be UL, C-UL and NSF listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

