



LMC-920

## LMC SERIES

### Self-contained Dual Temperature Island Display Merchandisers

#### MODELS

- LMC-600
- LMC-920
- LMC-1230

## FEATURES

#### CONSTRUCTION

- 24 gauge painted galvanized steel exterior, aluminum interior
- Stainless steel perimeter top cap
- 10 foot cord with molded plug
- Four easy-roll, heavy-duty casters
- Load level limit indicators
- 1 1/2" foamed-in-place "zero ODP" urethane insulation

#### FINISH

- Sparkling white polyester enamel interior and exterior
- Black base

#### REFRIGERATION

- Self-contained, bottom mount refrigeration system
- Cold wall evaporator
- Refrigerant: R-134a
- Temperature range: 41° to 0°F (5° to -18°C)
- R-factor (insulation efficiency rating): 12.93

#### WARRANTY

- Standard limited four year extended compressor and one year limited parts and labor

## OPTIONS

- Custom colors
- Plexiglass lid
- Inner liner baskets
- Adjustable bottom rack




# LMC SERIES


## SELF-CONTAINED DUAL TEMPERATURE ISLAND DISPLAY MERCHANDISERS

### TECHNICAL SPECIFICATIONS


MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. LB/KG
	L	D	H	L	D	H						
LMC-600	30 <sup>3</sup> / <sub>4</sub>	22 <sup>1</sup> / <sub>4</sub>	35 <sup>1</sup> / <sub>4</sub>	781	565	895	115	2.9	1/4	6.0	18.0	120/55
LMC-920	38 <sup>3</sup> / <sub>4</sub>	25 <sup>1</sup> / <sub>8</sub>	35 <sup>1</sup> / <sub>4</sub>	984	641	895	115	7.0	1/3	9.2	24.0	155/70
LMC-1230	46	26	36 <sup>1</sup> / <sub>4</sub>	1168	660	921	115	7.6	1/3	11.5	31.0	170/77

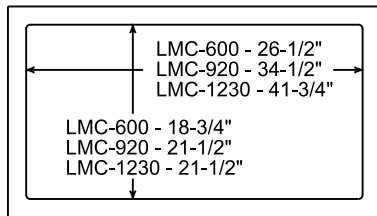

PLAN VIEW

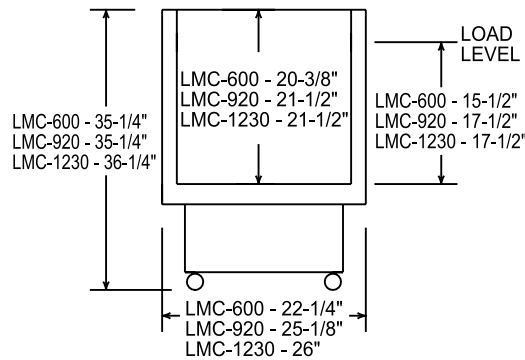

SIDE VIEW

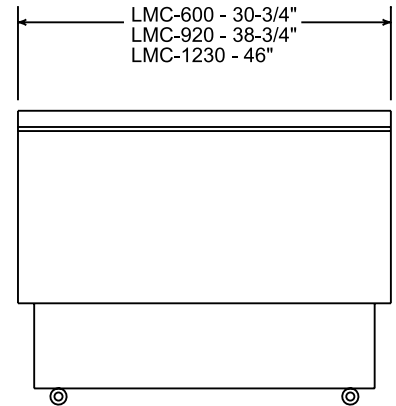

ELEVATION VIEW

### LISTINGS



### HOOKUP

Via plug in, 10 foot long, flexible 3 wire 14/3 cord with molded plug.



### BID SPECIFICATIONS

Item no. LMC-\_\_\_\_\_

Provide \_\_\_\_\_ ( )

Self-Contained Dual Temperature Island Display Merchandiser(s), Master-Bilt model no. LMC-\_\_\_\_\_.

Merchandiser to have stainless steel, perimeter top cap, four easy-roll, heavy-

duty casters, load level limit indicators and foamed-in-place "zero ODP" urethane insulation. The refrigeration system is to be bottom mounted, self-contained and use R-134a refrigerant. The temperature range of the cabinet will be 41° to 0°F (5° to -18°C).

Merchandiser to have standard limited

four year extended compressor warranty and one year limited parts and labor warranty.

Merchandiser to be UL listed and UL EPH classified.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652  
 PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

