



UNDERCOUNTER REFRIGERATORS

+4°C Auto Defrost and Manual Defrost

For General Laboratory / Pharmacy Storage



NSLR041WMW/0

Designed to meet the demanding requirements of scientific and laboratory applications. Special cabinet incorporates industrial quality with a heavy duty refrigeration system to maintain your valuable products.

SPECIFICATIONS FOR: NSLR041WMW/0 & NSLR041WMW/0M

- **Exterior finish:** The exterior front, door, top and sides are white painted enamel. The back and bottom are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are aluminum.
- **Insulation:** The complete cabinet and door are foamed-in-place with high density polyurethane foam insulation.
- **Hardware:** Pull door handle, door lock, one adjustable gray epoxy coated shelf & four 4" legs.
- **Electrical:** 115/60/1 cord and plug furnished.
- **Refrigeration:** Base mount refrigeration system. Undercounter/countertop refrigerators may be built in on three sides. The air intake and exhaust is through the base in front of the unit. Refrigerators are available with a forced air evaporator (NSLR041WMW/0) or a wrap around cold wall evaporator (NSLR041WMW/0M). Adjustable control range from +2°C to +8°C. Factory preset at +4°C.
- **Approvals:** UL & C-UL LISTED.**

STANDARD FEATURES

- Air-cooled condensing unit
- Aluminum interior
- **Automatic defrost on forced air model - NSLR041WMW/0**
- **Manual defrost on cold wall model - NSLR041WMW/0M**
- 4" legs
- Door lock
- Expansion valve system on forced air model
- Galvanized back & bottom
- Gray epoxy coated shelf
- High density polyurethane foam insulation
- Magnetic gasketing
- Non-CFC refrigerant
- Adjustable control range from +2°C to +8°C. Factory preset at +4°C
- White enamel front, door, top & sides
- UL & C-UL LISTED**
- Warranties: 18 month parts and labor. 5 years compressor (US and Canada 18 months parts (International)


OPTIONAL FEATURES

- Casters in lieu of legs
- 2" levelers in lieu of legs
- Hi/Lo alarm with remote contacts (mounted separate)
- Stainless steel exterior (Galv. back)
- Stainless steel interior
- Temperature chart recorder
- Chart paper
- Digital thermometer with Hi/Lo alarm (Field Installed)
- Extra shelves




Nor-Lake, Inc.
Registered to ISO 9001:2000
File No. A3204

**C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

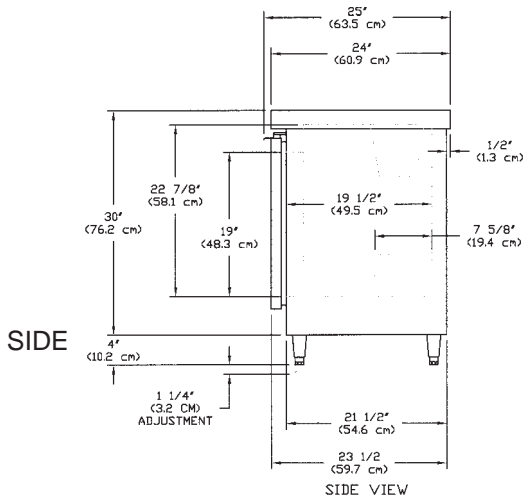


SIDE

SIDE VIEW

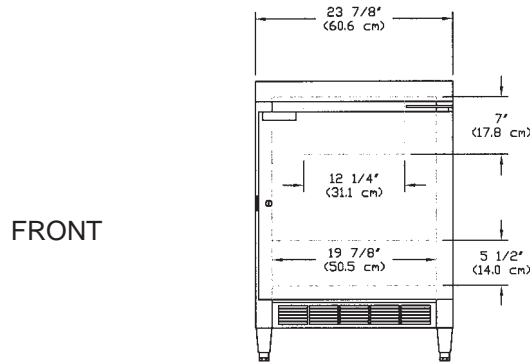


FRONT

NSLR041WMW/0 - Forced Air Model

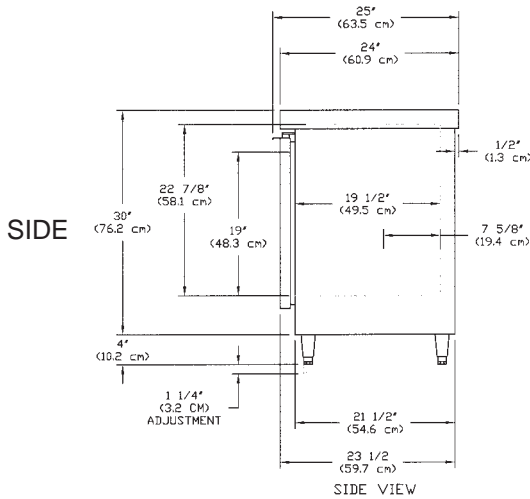

SIDE

SIDE VIEW

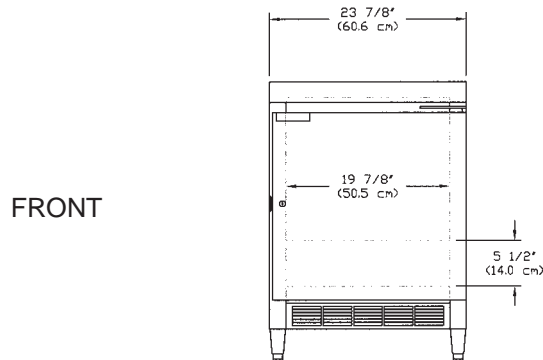

FRONT

NSLR041WMW/0M - Cold Wall Model

SPECIFICATIONS

	NSLR041WMW/0		NSLR041WMW/0M	
Model	Forced Air		Cold Wall	
Crated Height	35"	(88.9 cm)	35"	(88.9 cm)
Crated Width	28-1/2"	(72.4 cm)	28-1/2"	(72.4 cm)
Crated Depth	28"	(71.1 cm)	28"	(71.1 cm)
Crated Weight (lbs) (kg)	175	(79.38 kg)	175	(79.38 kg)
Interior Height	22-7/8"	(58.1 cm)	22-7/8"	(58.1 cm)
Interior Width	19-7/8"	(50.5 cm)	19-7/8"	(50.5 cm)
Interior Depth	19-1/2"	(49.5 cm)	19-1/2"	(49.5 cm)
Overall Height-Adjustable*	34" to	(86.4 to	34" to	(86.4 to
	35-1/4"	89.5 cm)	35-1/4"	89.5 cm)
Overall Width	23-7/8"	(60.6 cm)	23-7/8"	(60.6 cm)
Overall Depth	25"	(63.5 cm)	25"	(63.5 cm)
Gross Cubage (ft. ³) (m ³)	4.2	(0.12)	4.6	(0.13)
Shelf Area (sq. ft.) (m ²)	2.28	(0.21)	2.28	(0.21)
Number of Shelves	1		1	
Number of Casters (opt.)	4		4	
Number of Legs (std.)	4		4	
Condensing Unit Size	1/5		1/8	
Refrigerant	R-134A		R-134A	
Electrical Characteristics	115/60/1		115/60/1	
Cord & Plug Furnished	Yes		Yes	
Maximum Fuse Size	15		15	
NEMA Plug	5-15P		5-15P	
Total Amp Draw	4.3		3.5	

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with 4" adjustable legs. With the 3-5/8" casters the overall height is 33-5/8". With 2" levelers the overall height is adjustable from 32" to 32-1/2".

NORLAKE SCIENTIFIC[®]

Revision Date: 11/05
 © 2005 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 123347

Standex
 Food Service