


Undercounter Refrigerators/ Freezers & Chest Freezers



UC 540

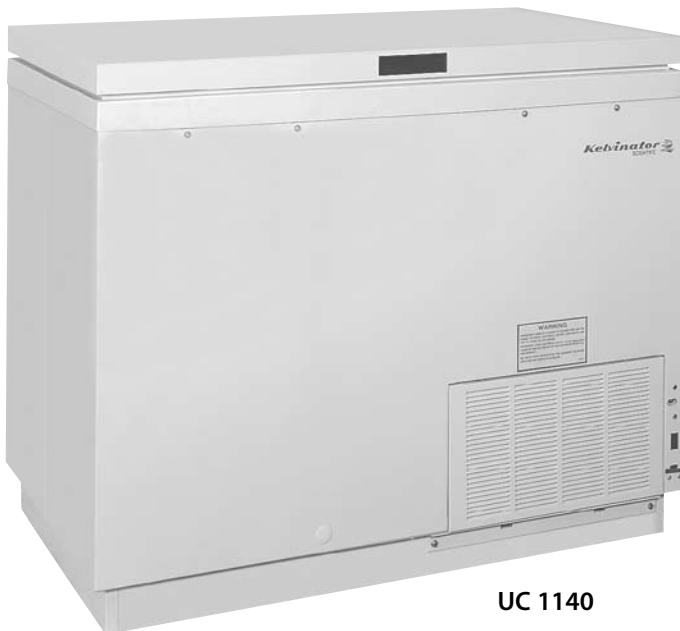

UC 1140

MODEL	UC 540	UC 1140
Capacity	4.6 Cu. Ft.	12.0 Cu. Ft.
Temperature Range	100% Run Time... -45°C	100% Run Time... -42°C
Exterior Dimensions	38 3/8" x 25 5/8" x 28 1/4"	38 3/8" x 46 1/2" x 28 1/4"
Interior Dimensions	19 1/2" x 21" x 21 1/2"	19 1/2" x 41 3/4" x 21 1/2"
Legs	None	None
Shelves	None	None
Interior Lighting	None	None
Insulation	2" Urethane Walls	2" Urethane Walls
Refrigerant	R404A	R404A
Condenser	Forced Air / Bare Tube	Forced Air / Bare Tube
Refrigerant Control	Capillary Tube	Capillary Tube
Alarm	Hi-Temp Battery Operated	Hi-Temp, Battery Operated
Evaporator	Cold Wall	Cold Wall
Thermostat	N/A - 100% Run	N/A - 100% Run
Defrost	Manual	Manual
Voltage	115V/60HZ/1PH	115V/60HZ/1PH
Running Amps	2.7 Amps	4.9 Amps
Supply Plug	15 Amp	15 Amp
Weight	225 Lbs.	345 Lbs.



"Manufacturers of Kelvinator Commercial Refrigeration Products"
563 Corbin Road • Honea Path, SC 29654
800-486-8369 • Fax: 864-369-1668
www.kelvinator.us

Project:

Quantity:

Item#:

Model Specified:

Approval: _____

Undercounter Refrigerators/Freezers & Chest Freezers

Undercounters -20°C to 7°C



Model BT650 – Undercounter refrigerator/freezer features a 5.3 cu. ft. (150 liters) refrigerator, a 0.7 cu. ft. (20 liters) freezer and two shelves. Refrigerator temperature range to 0°C (32°F). Freezer temperature range to -17.8°C (0°F).

TECHNICAL DATA

USA Model	BT450	BT650	BT660	BT680
Export Model	ETBT450			ETBT680
Capacity: (cu. Ft.)	4.5	5.3 (R)/0.7 (F)	6.1	6.1
(litres)	127.5	150 (R)/20 (F)	172.8	172.8
Temperature Range:	-20°C to -23°C, 5°F to -10°F	0°C/32°F (R), -17.8°C/0°F (F)	.6°C to 7.2°C, 33°F to 45°F	-6.7°C to -12.2°C, 20°F to -10°F
Exterior: (in.) HWD	34 1/2 x 23 7/8 x 23 3/4	34 1/2 x 23 7/8 x 23 3/4	34 1/2 x 23 7/8 x 23 3/4	34 1/2 x 23 7/8 x 23 3/4
(cm)	88 x 61 x 60	88 x 61 x 60	88 x 61 x 60	88 x 61 x 60
Interior: (in.)HWD	24 x 18 3/4 x 18	25 1/4 x 21 x 20 1/2	28 x 21 x 20	28 x 21 x 20
(cm)	61 x 47.6 x 45.7	64 x 53 x 52	72 x 53 x 52	71 x 53 x 52
Doors: Keylock	single solid	single solid	single solid	single solid
Legs:	glides	glides	glides	glides
Shelves:	2 shelves	2 shelves	2 shelves	2 shelves
Interior Lighting:	none	none	none	none
Insulation: Urethane	2 1/2" foam	1 1/8" foam	1 1/8" foam	1 1/8" foam
Refrigerant:	RA134A	RA134A	RA134A	RA134A
Compressor:	1/10 hp	1/10 hp	1/10 hp	1/10 hp
Condenser:	fin & tube, forced air	fin & tube, forced air	fin and tube, forced air	fin and tube, forced air
Air Circulation:	gravity	gravity	gravity	gravity
Refrigerant Control:	capillary tube	capillary tube	capillary tube	capillary tube
Evaporator:	plate and tube	plate and tube	plate and tube	plate and tube
Thermostat:	adjustable	adjustable	adjustable	adjustable
Defrost:	manual	manual	cycle	manual
Voltage: Domestic	115/60/1	115/60/1	115/60/1	115/60/1
Export	230/50/1	230/50/1	230/50/1	230/50/1
Running Amps:	3.3	3.3	3.3	3.3
Supply Plug:	5-15 NEMA	5-15 NEMA	5-15 NEMA	5-15 NEMA
Shipping: Cubic Ft.	14.5	14.5	14.5	14.5
Weight: (lbs.) Domestic	120	120	120	120
Export	160	160	160	160